


**FLANGE SPREADER**

**BFS-14/ BFS-8 FLANGE SPREADER**




**FEATURES AND BENEFITS**

- Practical, portable and light weight.
- Narrow jaw teeth-improved tool wear.
- Rapid assemble and disassemble.
- Removable handle for improved access.
- Increased step depth on upper steps.

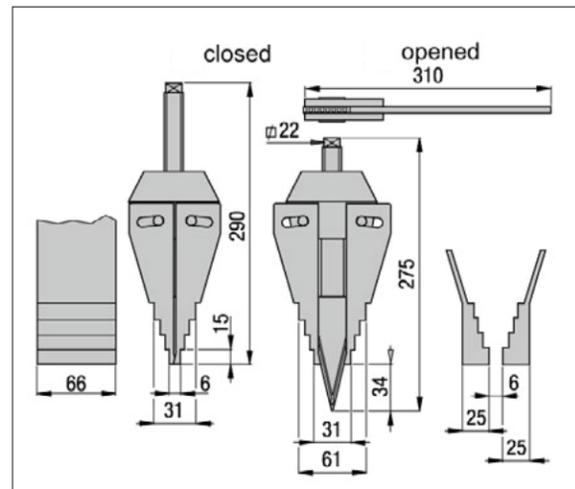

**BFS-8**

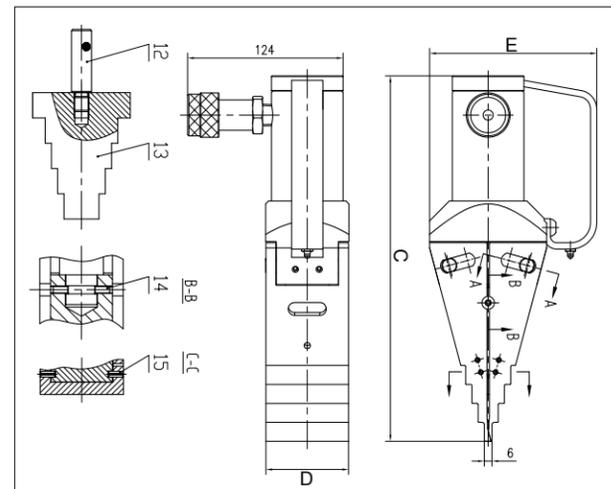

**BFS-14**

Model	Cylinder Capacity @ 10,000 PSI (700 bar)	Stroke	Top Clearance	Max. Spread Distance	Cylinder Effective Area	Weight	Dimensions		
							C	D	E
	Metric Ton	mm	mm/A	mm/B	mm <sup>2</sup>	kg	mm	mm	mm
<b>BFS-14</b>	14	121	6	81	1451	7.5	290	66	133
<b>BFS-8</b>	8	121	6	81	/	6.5	/	/	/

**FLANGE SPREADER**

**BFHS-14 INTEGRATED HYDRAULIC SPREADER**

Capacity: 14Ton  
Max. Pres.: 700Bar



**Features and Benefits:**

- Clamp body is made of alloy steel, very lightweight. 6mm top wedge tip thickness, 81mm maximum separation distance.
  - 14T cylinder with good tightness, no oil leakage. One-person operation, save your time and energy.
  - The head needs to be used with a hydraulic pump. Equipped with a plastic cap, to protect the head from dust.
  - Anti-slip and ergonomic handle gives you comfortable and safe using experience.
- Durable design and exquisite workmanship make it fit for your need.
- Integrated with a hydraulic pump, widely used for commissioning, replacement, dismantling of flanges.

Model	Cylinder Capacity @ 10,000 PSI (700 bar)	Stroke	Top Clearance	Max. Spread Distance	Cylinder Effective Area	Weight	Dimensions		
							L	W	H
	Metric Ton	mm	mm/A	mm/B	mm <sup>2</sup>	kg	mm	mm	mm
<b>BFHS-14</b>	14	121	6	81	1451	10	420	67	400